
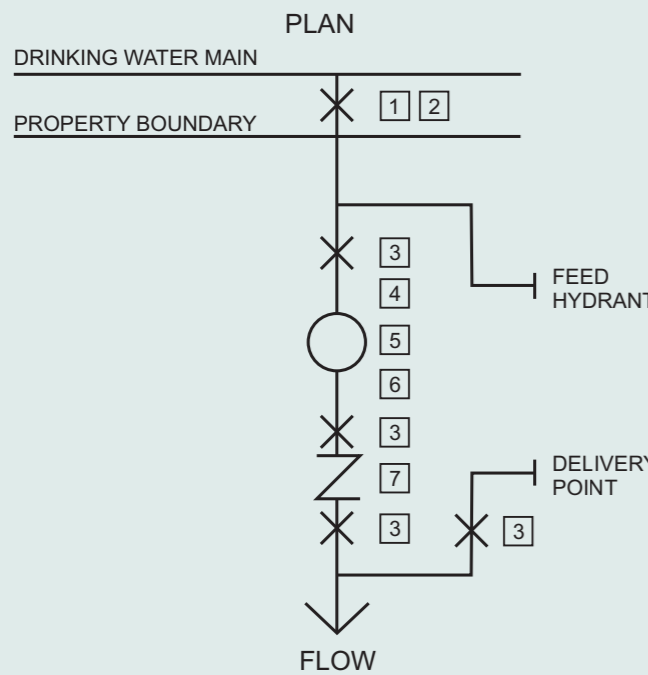


SCHEDULE OF ITEMS	
ITEM NO.	DESCRIPTION
1 & 2	REFER TO DRAWING 17
3	ISOLATING VALVE. IF BUTTERFLY VALVE TO BE GEAR SHUT TYPE (RESILIENT SEATED)
4	SPACER 5 x PIPE DIAMETER
5	ELECTRO MAGNETIC FLOW WATER METER. SUPPLIED BY WATER CORPORATION. DIRT BOX NOT REQUIRED
6	SPACER 3 x PIPE DIAMETER
7	SINGLE CHECK VALVE TESTABLE
<b>METERS 50mm AND ABOVE TO BE INDEPENDENTLY SUPPORTED FROM PIPE WORK</b>	
<b>SEE GENERAL NOTES FOR FURTHER INFORMATION</b>	

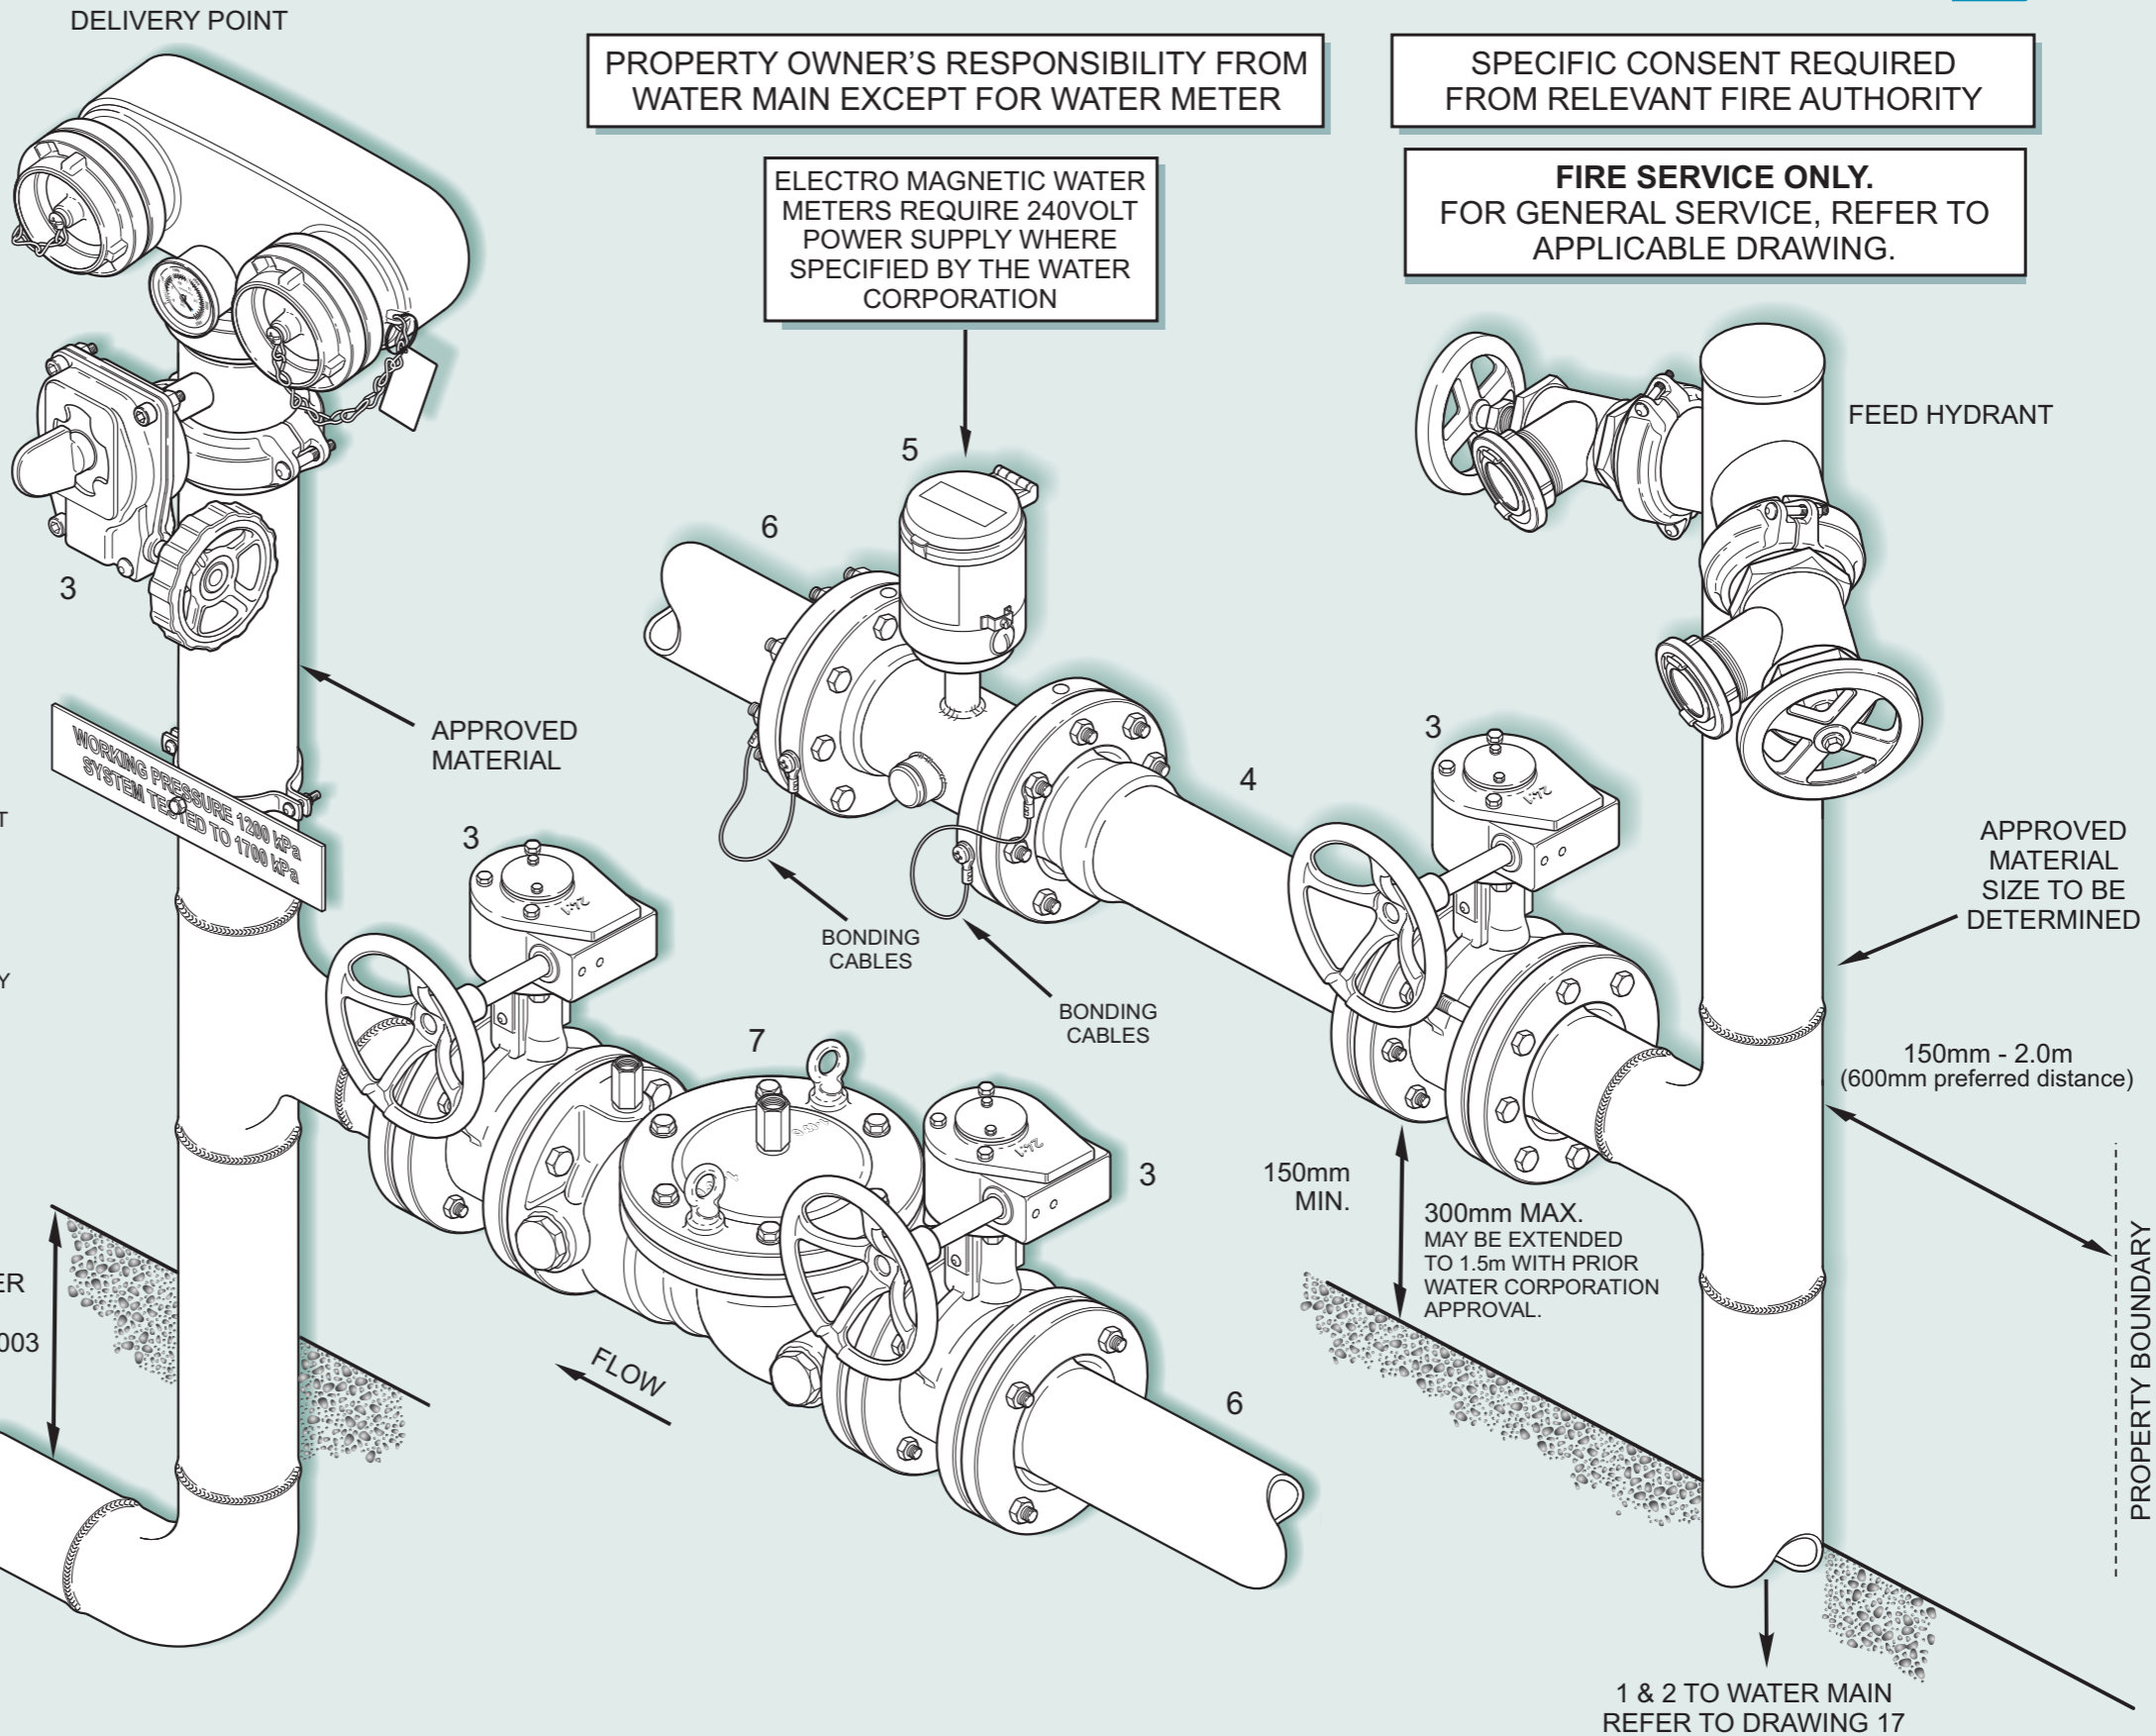

STANDARD LEGEND

	V	Valve
	M	Meter
	D.B.	Dirt Box
	S.P.	Straight Piece
	T.F.	Testing Ferrule
	L.S.	Line Strainer
	B.P.D.	Backflow Prevention Device (Testable or Non-Testable)
	S.C.V.T	Single Check Valve Testable
	S.C.D.A.T.	Single Check Detector Assembly Testable

DRAWING NUMBER:  
**13**

SCALE:  
NOT TO SCALE

DATE:  
AUGUST 2014

BOOSTER CONNECTION AROUND METER  
FIRE SPRINKLER SUPPLY  
TYPICAL ARRANGEMENT